

SQ-6

Supported SLink Connections

Firmware V1.2.0

**SQ-6
+AR84**



— dSnake Cat5e or higher

Total Input Sources: **39**
 Total Output Sockets: **20**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **8**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Remote Output Sockets
 XLR: **4**

**SQ-6
+AB168**



— dSnake Cat5e or higher

Total Input Sources: **47**
 Total Output Sockets: **24**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **16**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Remote Output Sockets
 XLR: **8**
 + ME connection


**SQ-6
+AR2412**



— dSnake Cat5e or higher — ME Cat5e or higher

Total Input Sources: **55**
 Total Output Sockets: **28**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **24**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Remote Output Sockets
 XLR: **12**
 + ME connection

**SQ-6
+AB168
+AR84**

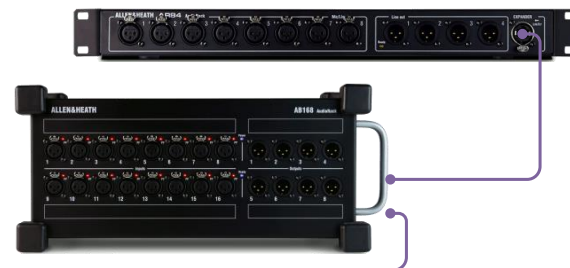

— dSnake Cat5e or higher

Total Input Sources: **55**
 Total Output Sockets: **28**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **24**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Remote Output Sockets
 XLR: **12**

SQ-6
+AB168
+AB168




ME PERSONAL MIXING SYSTEM

Total Input Sources: **63**
 Total Output Sockets: **32**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **32**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Remote Output Sockets
 XLR: **16**
 + ME connection

dSnake Cat5e or higher

SQ-6
+AR2412
+AB168

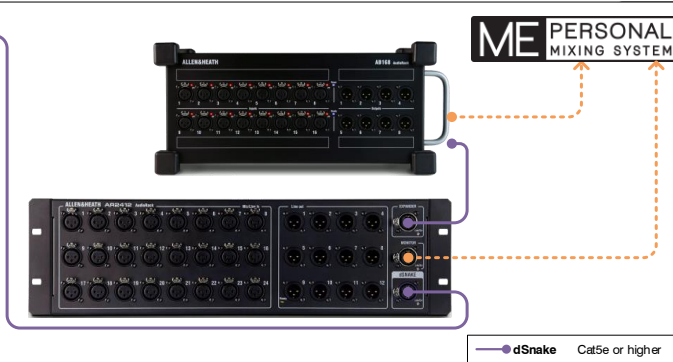


ME PERSONAL MIXING SYSTEM

Total Input Sources: **71**
 Total Output Sockets: **36**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **40**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Remote Output Sockets
 XLR: **20**
 + ME connection

dSnake Cat5e or higher

SQ-6
+ME

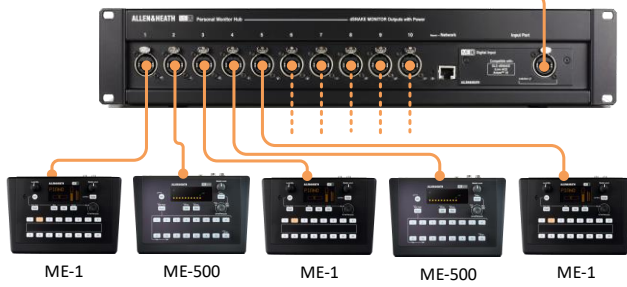

Total Input Sources: **31**
 Total Output Sockets: **16**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Channels to ME: **40**

ME-U provides PoE to power ME-1 and ME-500 units

dSnake Cat5e or higher

SQ-6
+ME




Total Input Sources: **31**
 Total Output Sockets: **16**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Channels to ME: **40**

ME-1 and ME-500 units must be powered separately

dSnake Cat5e or higher

**SQ-6
+ DX168
(96kHz)**

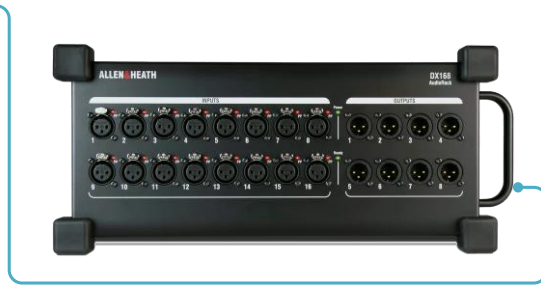

—● DX Cat5e or higher

Total Input Sources: **47**
 Total Output Sockets: **24**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **16**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Remote Output Sockets
 XLR: **8**

**SQ-6
+ DX168
+ DX168
(96kHz)**



ⓘ Use cascade mode for the first DX168 in the chain

—● DX Cat5e or higher

Total Input Sources: **63**
 Total Output Sockets: **32**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **32**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Remote Output Sockets
 XLR: **16**

**SQ-6
+ DX Hub
+ 3 x DX168
(96kHz)**




ⓘ Up to 2 DX168s can be connected to each port using cascade mode

—● gigaACE Cat5e or higher
 —● DX Cat5e or higher

Total Input Sources: **79**
 Total Output Sockets: **40**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **48**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Remote Output Sockets
 XLR: **24**

**SQ-6
+ DX Hub
+ 8 x DX168
(96kHz)**

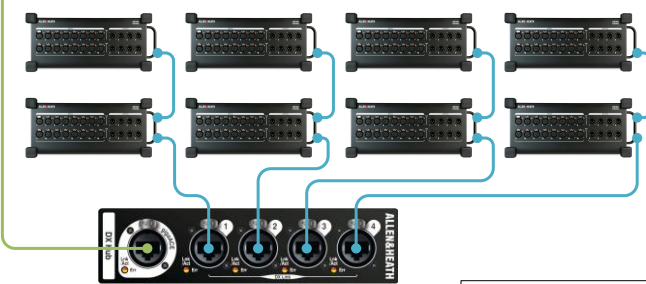

ⓘ Up to 2 DX168s can be connected to each port using cascade mode

—● gigaACE Cat5e or higher
 —● DX Cat5e or higher

Total Input Sources: **159**
 Total Output Sockets: **80**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **128**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Remote Output Sockets
 XLR: **64**

**SQ-6
+Qu**



Qu-16 / Qu-24 / Qu-32 / Qu-Pac / Qu-SB

dSnake Cat5e or higher

Total Input Sources: **91**
 Total Outputs: **56**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Remote Inputs
 dSnake: **60**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Remote Outputs
 dSnake: **40**

**SQ-6
+SQ
(96kHz)**



SQ-5 / SQ-6

GigaACE Cat5e or higher

Total Input Sources: **159**
 Total Outputs: **144**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Remote Inputs
 GigaACE: **128**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Remote Outputs
 GigaACE: **128**

**SQ-6
+dLive
(96kHz)**



GigaACE Option Card

dLive System (Any)

GigaACE Cat5e or higher

Total Input Sources: **159**
 Total Outputs: **144**
 Local Input Sources
 Mic/Line: **24 + 1**
 Line: **6**
 Remote Inputs
 GigaACE: **128**
 Local Output Sockets
 XLR + TRS: **14 + 2**
 Remote Outputs
 GigaACE: **128**